



Telecommunications
Standards Advisory
Committee (TSAC)

Technical Specification

Dedicated Short-
Range
Communications in
Intelligent Transport
Systems

**IMDA TS DSRC
Issue 1 Rev 1, October 2017**

Info-communications Media Development Authority
Resource Management & Standards
10 Pasir Panjang Road
#10-01 Mapletree Business City
Singapore 117438

© Copyright of IMDA, 2017

This document may be downloaded from the IMDA website at <http://www.imda.gov.sg> and shall not be distributed without written permission from IMDA

Acknowledgement

The Info-communications Media Development Authority (IMDA) and the Telecommunications Standards Advisory Committee (TSAC) would like to acknowledge the following members of the TSAC Working Group 3 Intelligent Transport Systems (ITS) – Dedicated Short Ranged Communication (DSRC) Task Force (TSAC WG3 ITS-DSRC TF) for their invaluable contributions to the preparation of this Technical Specification:

| | |
|--|--|
| IMDA TS DSRC Issue 1 Revision 1, October 2017 | Technical Specification for Dedicated Short-Range Communications (DSRC) in Intelligent Transport Systems (ITS) |
| Chairman(s) | Dr Jaya Shankar; Department Head, Institute for Infocomm Research (I ² R), A*STAR (Chairman) |
| | Dr Zander Lei; Senior Researcher, Huawei Singapore Research Center (Co-Chairman) |
| Chief Editor | Dr Zander Lei; Senior Researcher, Huawei Singapore Research Center |
| Editors | Dr Guan Yong Liang; Associate Professor, Nanyang Technological University |
| | Mr Paul Mellon; Systems Engineer, Kapsch TrafficCom Pte Ltd |
| | Mr Katayan Riyas; Manager, Institute for Infocomm Research (I ² R), A*STAR |
| | Mr Mike Cheong; Account Manager, Rohde & Schwarz |
| | Mr Colin Yap; Principal Engineer, Land Transport Authority |
| | Mr Luoyi Huang; Senior Engineer, Denso International Asia Pte Ltd |
| Secretary | Mr Colin Yap; Principal Engineer, Land Transport Authority |

List of TSAC WG3 ITS-DSRC TF Members (2015-2018)

| S/N | Organisation | Name |
|-----|--|---|
| 1 | Association of Telecommunications Industry of Singapore (ATIS) | Mr Yip Yew Seng, Honorary Secretary |
| 2 | Continental Automotive Singapore | Mr Dan Chia, Senior Manager |
| 3 | Delphi Electronics & Safety, Singapore | Dr Teo Kiat Choon, Manager |
| 4 | DENSO International Asia Pte Ltd | Mr Bruce Eng, General Manager |
| 5 | | Mr Luoyi Huang, Senior Engineer |
| 6 | D'Crypt Pte Ltd | Dr. Antony Ng, CEO |
| 7 | Huawei Singapore Research Center | Dr Zander Lei, Senior Researcher |
| 8 | IBM Singapore Pte Ltd | Mr Pankaj Lunia, ASEAN Business Manager |
| 9 | Info-communications Media Development Authority | Mr Andy Phang, Senior Manager |
| 10 | | Mr Lim Wei Li, Manager |
| 11 | | Ms Tan Siew Guat, Manager |

| | | |
|----|---|---|
| 12 | Institute for Infocomm Research (I ² R), A-STAR | Dr Jaya Shankar; Department Head |
| 13 | | Mr Katayan Riyas, Manager |
| 14 | Kapsch TrafficCom Pte Ltd | Mr Johan Ahlberg, Sales Director |
| 15 | | Mr Paul Mellon, Systems Engineer |
| 16 | National University of Singapore | Dr Masaaki Sato, Visiting Senior Research Fellow |
| 17 | Land Transport Authority | Mr Chang Mook Choong, Deputy Director |
| 18 | | Mr Chan Hin Phung, Principal Manager |
| 19 | | Mr Ong Beng Kee, Senior Manager |
| 20 | | Ms Goh Lee Ming, Manager |
| 21 | | Mr Colin Yap, Principal Engineer |
| 22 | | Mr Francis Tan, Senior Engineer |
| 23 | Mitsubishi Heavy Industries Engine System Asia Pte Ltd | Mr Yamamoto Masayuki, Project Director |
| 24 | | Mr Kamimura Yoichi, Deputy Manager |
| 25 | NCS Pte Ltd | Mr Eddie Lim Sing Loong, Account Director |
| 26 | Nanyang Polytechnic | Mr Tan Keng Chuah, Manager |
| 27 | Nanyang Technological University | Dr Guan Yong Liang, Associate Professor |
| 28 | NXP Semiconductors Singapore Pte Ltd | Mr Marcus Lim Ah Sui, Senior Applications Manager |
| 29 | Power Automation | Mr Kerk See Gim, Project Director |
| 30 | Quantum Inventions Pte Ltd | Mr Mohit Sindhvani, Head |
| 31 | Rohde & Schwarz | Mr Mike Cheong, Account Manager |
| 32 | Singapore Police Force | Mr Toh Keng Han, Programme Manager |
| 33 | ST Electronics (Info-Comm Systems) | Mr Nixon Ng Ho Kwong, Senior Director |
| 34 | | Dr Albert Ng Kim Chwee, Deputy Division Manager |
| 35 | | Mr Joseph Chin Chee Wai, Business Director |
| 36 | Toyota Tsusho Asia Pacific Pte Ltd | Mr Richard Lee, General Manager |
| 37 | Watchdata Technologies Pte Ltd | Mr James Cai Mao, Director |

| | |
|------------------|--|
| | Singapore Telecommunications Ltd |
| Mr Lew Yoon Heng | Senior Engineering Manager Singapore Telecommunications Ltd |
| Mr Jason Tan | Head, Standards SPRING Singapore |
| Mr Lim Eng Huat | Vice President Starhub Ltd |
| Mr Hong Tse Min | Assistant Director, Resource Management and Standards Info-communications Media Development Authority |
| Ms Woo Yim Leng | Senior Manager, Resource Management and Standards Info-communications Media Development Authority |

This page is intentionally left blank.

Content

| Section | Title | Page |
|---------|--|------|
| | Preface (Placeholder) | |
| 1 | Scope | 2 |
| 2 | References | 2 |
| 3 | Definition and Abbreviations | 3 |
| 4 | General Requirements | 4 |
| 4.1 | Design of DSRC Devices | 4 |
| 4.2 | Safety Requirements | 4 |
| 5 | Technical Requirements for DSRC | 5 |
| 5.1 | Category of Use Cases | 5 |
| 5.2 | Protocol Stack | 5 |
| 5.3 | DSRC Devices and Conformity Assessment Requirements | 6 |
| 5.4 | Spectrum Allocation and Power Limits | 6 |
| 5.5 | Power Classes, Antenna Height and Communication Zones | 7 |
| 5.6 | Spectrum Mask, Interference, and Coexistence | 8 |
| 5.7 | Receiver Minimum Input Sensitivity | 8 |
| 5.8 | Receiver Adjacent and Non-Adjacent Channel Rejection | 8 |
| 5.9 | Channel Types | 9 |
| 5.10 | Communication Services | 10 |
| 5.11 | User Priority | 10 |
| Annex A | Use Cases | 11 |
| Annex B | Protocol Implementation Conformance Statement (PICS) | 12 |
| Annex C | Corrigendum / Addendum – Changes to IMDA TS DSRC Issue 1, Oct 16 | 19 |

This Technical Specification is a living document which is subject to review and revision.

NOTICE

THE INFO-COMMUNICATIONS MEDIA DEVELOPMENT AUTHORITY (“IMDA”) MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THE MATERIAL PROVIDED HEREIN AND EXCLUDES ANY EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS OF NON-INFRINGEMENT, MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. SUBJECT TO THE MAXIMUM EXTENT PERMITTED UNDER LAW, IMDA SHALL NOT BE LIABLE FOR ANY ERRORS AND/OR OMISSIONS CONTAINED HEREIN OR FOR ANY LOSSES OR DAMAGES (INCLUDING ANY LOSS OF PROFITS, BUSINESS, GOODWILL OR REPUTATION, AND/OR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES) IN CONNECTION WITH THE USE OF THIS MATERIAL.

IMDA DRAWS ATTENTION TO THE POSSIBILITY THAT THE PRACTICE OR IMPLEMENTATION OF THIS STANDARD MAY INVOLVE THE USE OF INTELLECTUAL PROPERTY RIGHTS AND TAKES NO POSITION CONCERNING THE EXISTENCE, VALIDITY AND/OR APPLICABILITY OF ANY SUCH INTELLECTUAL PROPERTY RIGHTS, WHETHER ASSERTED BY TSAC MEMBERS OR ANY THIRD PARTY.

AS OF THE DATE OF APPROVAL OF THIS STANDARD, IMDA HAS NOT RECEIVED WRITTEN NOTICE OF ANY PATENT RIGHTS WHICH MAY BE RELEVANT IN RELATION TO THE IMPLEMENTATION OF THIS STANDARD. HOWEVER, IMPLEMENTERS ARE CAUTIONED THAT THIS MAY NOT REPRESENT THE LATEST INFORMATION AND ARE THEREFORE STRONGLY URGED TO CHECK WITH THE RELEVANT DATABASE IN ITU, ISO, IEC OR THE RELATED STANDARDS DEVELOPMENT ORGANISATION FOR INFORMATION OF PATENT RIGHTS. IMPLEMENTERS ARE ADVISED TO OBTAIN THEIR OWN LEGAL AND/OR TECHNICAL ADVICE IN RELATION TO THE IMPLEMENTATION OF THE STANDARD IF REQUIRED.

Dedicated Short-Range Communications (DSRC) Standards for Intelligent Transport Systems (ITS)

1 Scope

- 1.1 This Specification is established based on the current standards for wireless connectivity, which include IEEE 802.11 with modifications to the PHY and MAC Layer to provide reliable and low latency communications in vehicles, Dedicated Short Range Communication (DSRC) in the 5 GHz spectrum, and IEEE 1609 wireless access vehicular environment (WAVE) for security and network management.
- 1.2 The Specification is intended for developing Intelligent Transportation Systems (ITS) for improving traffic management, transportation safety and mobility, and an ITS architecture for Vehicle-to-Vehicle (V2V) and Vehicle-to-Infrastructure (V2I) communications.

2 References

In establishing the technical requirements of this Specification, reference has been made to the following documents:

- [1] IEEE Std 802.11-2012¹, IEEE Standard for Information technology – Telecommunication and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) specifications
- [2] IEEE Std 1609.2-2016, IEEE Standard for Wireless Access in Vehicular Environment (WAVE) - Security Services for Applications and Management Messages
- [3] IEEE Std 1609.3-2016, IEEE Standard for Wireless Access in Vehicular Environment (WAVE) - Networking Services
- [4] IEEE Std 1609.4-2016, IEEE Standard for Wireless Access in Vehicular Environment (WAVE) - Multi Channel Operation
- [5] IEEE Std 1609.11-2010, IEEE Standard for Wireless Access in Vehicular Environment (WAVE) - Over-the-Air Electronic Payment Data Exchange Protocol for Intelligent Transportation Systems (ITS)
- [6] IEEE Std 1609.12-2016, IEEE Standard for Wireless Access in Vehicular Environment (WAVE) - Identifier Allocations
- [7] SAE (Society of Automotive Engineers) J2735-2009², Dedicated Short Range Communications (DSRC) Message Set Dictionary
- [8] IEEE Std 1609.0-2013, IEEE Guide for Wireless Access In Vehicular Environment (WAVE) Architecture
- [9] IEC CISPR 32, Electromagnetic Compatibility of Multimedia Equipment – Emission Requirements
- [10] IEC 60950-1, International Electrotechnical Commission – Safety of Information Technology Equipment

¹ IEEE publications are available from the Institute of Electrical and Electronics Engineers, Inc, 445 Hoes Lane, Piscataway, NJ 08854, USA (<http://standards.ieee.org/>). The IEEE standards or products referred to in this clause are trademarks of the Institute of Electrical and Electronics Engineers, Inc.

² SAE publications are available from the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096, USA (<http://www.sae.org/>).

3 Definition and Abbreviations

For the purpose of this document, the following terms and definitions apply.

3.1 Definitions

The industrial, scientific and medical (ISM) band: radio bands (portions of the radio spectrum) that are reserved internationally for the use of radio frequency (RF) energy for industrial, scientific and medical purposes other than telecommunications.

Vehicle to Infrastructure (V2I), Infrastructure to Vehicle (I2V): direct communication from a vehicle to road infrastructure or road infrastructure to vehicles using the 5.9 GHz DSRC frequency spectrum

Vehicle to vehicle (V2V): direct vehicle(s) to vehicle(s) communication using the 5.9 GHz DSRC frequency spectrum

3.2 Abbreviations

| | |
|--------|---|
| AV | Autonomous Vehicle |
| BSM | Basic Safety Message |
| CCH | Control Channel |
| DSRC | Dedicated Short Range Communications |
| EDCA | Enhanced Distributed Channel Access |
| EIRP | Equivalent Isotropic Radiated Power |
| EMF | Electromagnetic Fields |
| EPS | Electronic Parking System |
| FCC | Federal Communications Commission |
| ICNIRP | International Commission on Non-Ionizing Radiation Protection |
| IEEE | Institute of Electrical and Electronic Engineers |
| IP | Internet Protocol |
| IPv6 | Internet Protocol version 6 |
| ISO | International Organization for Standardization |
| ISM | Industrial, Scientific and Medical |
| ITS | Intelligent Transportation Systems |
| LLC | Logical Link Control |
| MAC | Media Access Control |
| OBU | On Board Unit |
| PER | Packet Error Rate |
| PHY | Physical |
| PSID | Provider Service Identifier |
| RF | Radio Frequency |
| RSU | Road Side Unit |
| SAE | Society of Automotive Engineers |
| SCH | Service Channel |
| SPaT | Signal Phase and Timing |
| TCP | Transmission Control Protocol |
| TIM | Traveller Information Message |
| UDP | User Datagram Protocol |
| V2I | Vehicle to Infrastructure |
| V2V | Vehicle to Vehicle |
| VMS | Variable Message System |
| WAVE | Wireless Access in Vehicular Environments |
| WG | Working Group |
| WSA | WAVE Service Advertisement |
| WLAN | Wireless Local Area Network |
| WSM | WAVE Short Message |
| WSMP | WAVE Short Message Protocol |

4 General Requirements

4.1 Design of DSRC Devices

The DSRC device shall be designed to meet the following requirements:

- a) The DSRC device shall not be constructed with any external or readily accessible control which permits the adjustment of its operation in a manner that is inconsistent with this Specification;
- b) The DSRC device shall be marked with the supplier/manufacturer's name or identification mark, and the supplier/manufacturer's model or type reference. The markings shall be legible, indelible and readily visible; and
- c) DSRC devices shall have different power classes as defined in this Specification, corresponding to the varied communication zones. DSRC devices shall transmit only the power needed to communicate within the communications zone, and must take steps to limit the signal within the zone to the maximum extent practicable. DSRC devices consist of Road Side Units ("RSUs") and On Board Units ("OBUs"). RSUs may have additional conditions on antenna height and power as defined in § 5.

4.2 Safety Requirements

4.2.1 Where appropriate, the DSRC device shall be tested according to measurement methods and limits for:

- a) Electromagnetic Compatibility (EMC) emissions from the direct DC power or AC mains power input/output ports defined in IEC CISPR 32 [9]; and
- b) Electrical safety defined in IEC 60950-1 [10].

4.2.2 Where appropriate, the DSRC device shall comply with the International Commission on Non-Ionising Radiation Protection ("ICNIRP") guidelines for limiting exposure to time-varying electromagnetic field ("EMF") in the frequency range up to 300 GHz.

4.2.3 It should be noted that compliance with any radiation safety standard does not by itself confer immunity from legal obligations and requirements imposed by national health or safety authorities.

5 Technical Requirements for DSRC

5.1 Category of Use Cases

Description of use cases for DSRC is given as general information in Annex A of this Specification. Use cases may be broadly categorised as follows:

- a) Localisation
- b) Electronic Parking Management
- c) Traffic Signal Control Management
- d) Traffic Information
- e) Safety Applications
- f) Emergency Applications
- g) Kiosk Related Services
- h) Other ITS Application and Services

The DSRC deployed according to this Specification, should take the following factors into consideration: the communication range is within 1000m (typically 10m – 1000m), the need for control channel, antenna beam directionality, differentiation of channel usage (public, private and V2V) and urgency, and the possibility of overlapping cells (in radio coverage) and network congestion.

5.2 Protocol Stack

Components of the 5.9 GHz DSRC protocol stack for Singapore are as shown in Figure 1, based on the IEEE 1609 family of WAVE standards.

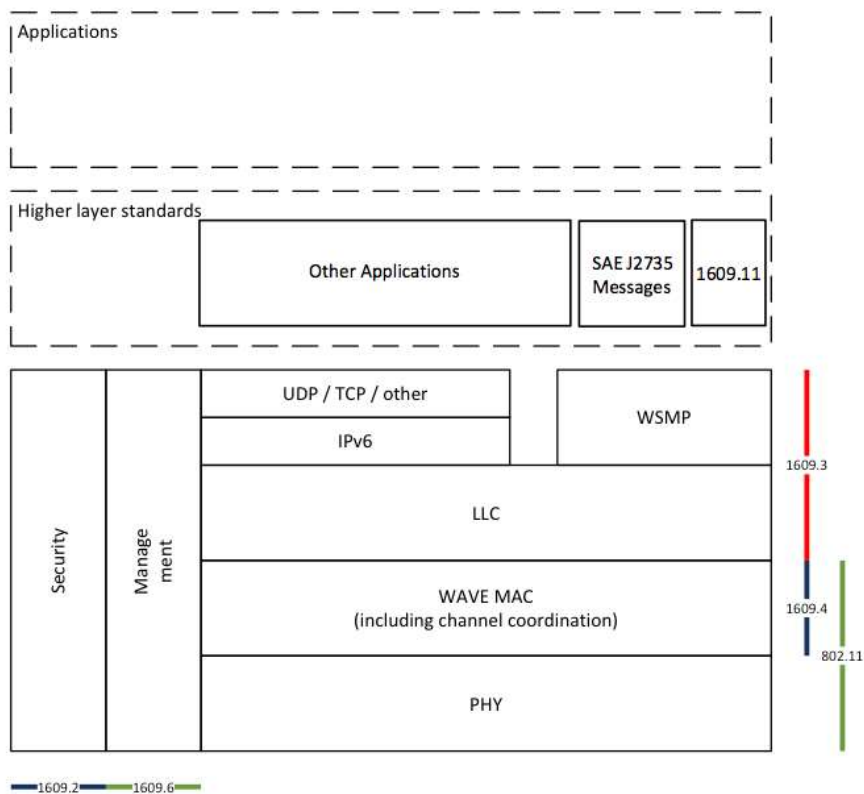


Figure 1: The Singapore 5.9 GHz DSRC Protocol Stack (Based on the IEEE 1609.0 WAVE Architecture)

5.3 DSRC Devices and Conformity Assessment Requirements

5.3.1 DSRC devices shall be able to support at minimum the features of the WAVE protocol standards implemented by service provider(s) as outlined in the Protocol Implementation Conformance Statement (PICS) Tables given in Annex B of this Specification.

5.3.2 The WAVE protocol requirements specific to the DSRC implementation(s) of the Singapore service provider(s) are based the following IEEE standards:

a) IEEE 802.11 WLAN MAC and PHY layer specifications, operating Outside the Context of a Basic service set (OCB)

The DSRC device shall comply with the statement of mandatory and optional features set out in the PICS Table B.1 of this Specification for an implementation of IEEE 802.11 [1].

b) IEEE 1609.4 for Multi-Channel Operations

The DSRC device shall comply with the statement of mandatory and optional features set out in the PICS Table B.2 of this Specification for an implementation of IEEE 1609.4 [4].

c) IEEE 1609.3 for Networking Services

The DSRC device shall comply with the statement of mandatory and optional features set out in the PICS Table B.3 of this Specification for an implementation of IEEE 1609.3 [3]. The DSRC device shall also comply with the IEEE 1609.2 security profile, SSP specification, and additional certificate constraints that apply to the WSA (Annex H of IEEE 1609.3).

d) IEEE 1609.11 [5] for Over-the-Air Electronic Payment Data Exchange Protocol for ITS

This is an application-level DSRC-based standard, which specifies a payment protocol, referencing to the ISO standards. This standard defines a basic level of technical interoperability for electronic payment equipment, i.e. OBU and RSU.

e) IEEE 1609.12 [6] for Identifier Allocations

This specifies the allocation of Provider Service Identifier (PSID) for use with the IEEE 1609 family of standards. For example, it may be used by a service provider to identify its advertised application-service opportunities by means of the PSID values in the WSA messages it transmits.

f) IEEE 1609.2 for Security Services for Applications and Management Messages

This standard defines secure message formats and processing for use by Wireless Access in Vehicular Environments (WAVE) devices, including methods to secure WAVE management messages and methods to secure application messages. It also describes administrative functions necessary to support the core security functions.

The DSRC device shall comply with the statement of mandatory and optional features set out in the PICS Table B.4 of this Specification for an implementation of IEEE 1609.2 [6].

g) SAE J2735 [7] DSRC Message Set Dictionary


This standard defines a set of messages that may be used for V2V and V2I safety exchanges. Examples are not limited to the use of the broadcast type Basic Safety Message (BSM) as a WSM for probe data collection and V2V safety applications; use of the Signal Phase and Timing (SPaT) and the Map Data (MAP) messages as WSMs to broadcast traffic signal and map data to vehicles from an intersection roadside; and the use of the broadcast type Traveller Information Message (TIM) as a WSM for travel times, parking information and hazard warnings.

5.4 Spectrum Allocation and Power Limits

5.4.1 The 5.9 GHz frequency spectrum from 5.855 GHz to 5.925 GHz has been allocated for operation of DSRC in Singapore. For DSRC devices, the available spectrum is divided into seven 10MHz channels, as illustrated in Figure 2.

5.4.2 The DSRC device shall comply with the maximum field strength or radio frequency (RF) output

power³ illustrated in Figure 2, operating in its intended frequency band or frequencies. It is notable that there are two power limits defined for the spectrum from 5.885 GHz to 5.895 GHz, which will be elaborated in § 5.10 (Communication Services).

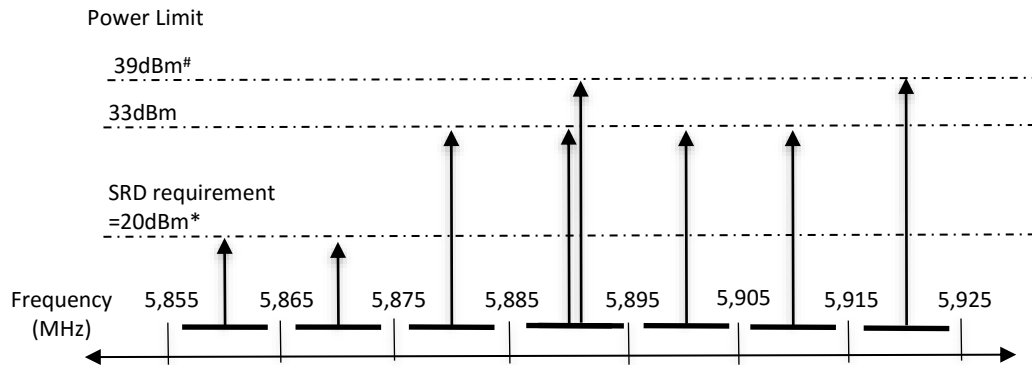

- # Higher RF emission power shall be approved only on an exceptional basis
- * Reference to IMDA TS SRD for maximum allowable RF output power

Figure 2: DSRC Spectrum Power Limit

5.5 Power Classes, Antenna Height and Communication Zones

- 5.5.1 There are four classes of DSRC devices in terms of output power defined in this Specification, as shown in Table 1. A DSRC device shall meet both the Max output power and the EIRP limit requirements. This is in line with the FCC rule in the USA, except for the Class D EIRP requirement. An indicative communication zone of each class is also shown in Table 1.
- 5.5.2 Table 1 shall also be applicable to any RSU with an antenna height not exceeding 8 meters from the roadway bed surface⁴.

Table 1: Power Classification

| Power Class | Max output power ⁵ (mW) | EIRP Limit ⁶ (dBm) | Communication Zones (m, indicative) |
|----------------|------------------------------------|-------------------------------|-------------------------------------|
| A | 1 | 23 | 15 |
| B | 10 | 23 | 100 |
| C | 100 | 33 | 400 |
| D ⁷ | 760 | 39 | 1000 |

- 5.5.3 For any RSU with an antenna height exceeding 8 meters but not exceeding 15 meters above the roadway bed surface, Table 1 shall be applicable together with a reduction factor of $20 \log(Ht/8)$ in dB, where Ht is the height of the radiation centre of the antenna in meters above the roadway bed surface. The EIRP is measured as the maximum EIRP toward the horizon or horizontal, whichever is greater, of the gain associated with the main or centre of the transmission beam. The RSU antenna

³ Equivalent Isotropic Radiated Power (e.i.r.p.) is a product of the power supplied to the antenna and the maximum antenna gain, relative to an isotropic antenna, and is used for frequencies above 1 GHz. There is a constant difference of 2.15 dB between e.i.r.p. and e.r.p. [e.i.r.p. (dBm) = e.r.p. (dBm) + 2.15]

⁴ Separate antenna height mounting approval(s) should be obtained from the relevant authorities.

⁵ Max output power refers to the power level at the input of antenna, or its equivalent using an isotropic antenna.

⁶ The EIRP limit is only applicable to devices operating in channels 176-184 (5.875 – 5.925 GHz), which are defined in Table 5. Devices operating in channel 172 or 174 shall (i) operate based on non-protection basis; and (ii) comply with all the requirements set out in the IMDA TS SRD for the 5.8 GHz band.

⁷ The Power Class D DSRC devices and RSU are restricted for public safety uses only.

height shall not exceed 15 meters above the roadway bed surface.

5.6 Spectrum Mask, Interference, and Coexistence

- 5.6.1 For any DSRC device using the 10 MHz channel spacing, the transmitted power spectral density shall have a 0 dBr bandwidth not exceeding 9 MHz and shall not exceed the spectrum mask created, using the permitted power spectral density levels as specified in Table 2, based on the IEEE 802.11 [1].
- 5.6.2 For any DSRC device, the out-of-band (below 5845 MHz or above 5935 MHz) emissions shall not exceed an EIRP of -30 dBm/MHz.

Table 2: Spectrum Mask

| Power Class | Permitted Power Spectrum Density (dBr/MHz) | | | | |
|-------------|--|----------|------------|-----------|-----------|
| | +/- 4.5MHz | +/- 5MHz | +/- 5.5MHz | +/- 10MHz | +/- 15MHz |
| A | 0 | -10 | -20 | -28 | -40 |
| B | 0 | -16 | -20 | -28 | -40 |
| C | 0 | -26 | -32 | -40 | -50 |
| D | 0 | -35 | -45 | -55 | -65 |

5.7 Receiver Minimum Input Sensitivity

- 5.7.1 The receiver sensitivity is defined as the min Rx signal level at the antenna connector required for a given pack error rate and modulation scheme. The minimum input level for receiver sensitivity shall be no more than 10% PER of occurrence, based on Table 3.

Table 3: Receiver Minimum Input Sensitivity

| Modulation | Coding Rate | Minimum Sensitivity (dBm) (10 MHz channel spacing) |
|------------|-------------|--|
| BPSK | 1/2 | -85 |
| BPSK | 3/4 | -84 |
| QPSK | 1/2 | -82 |
| QPSK | 3/4 | -80 |
| 16QAM | 1/2 | -77 |
| 16QAM | 3/4 | -73 |
| 64QAM | 2/3 | -69 |
| 64QAM | 3/4 | -68 |

5.8 Receiver Adjacent and Non-Adjacent Channel Rejection

- 5.8.1 The adjacent/non-adjacent channel rejection, i.e. the power difference between the interfering and the desired channel, which measures the ability of a receiver to demodulate and decode a desired signal in the presence of an interfering signal in an adjacent or nonadjacent channel. The desired signal power is set 3 dB above the minimum sensitivity. The power of the interfering signal in the adjacent/non-adjacent channel is increased until the measured PER of the wanted signal reaches 10%.
- 5.8.2 The receiver adjacent/non-adjacent channel rejection under specified conditions shall be equal to or

greater than the limits based on Table 4.

Table 4: Receiver Adjacent and Non-Adjacent Channel Rejection Requirements

| Modulation | Coding Rate | Adjacent Channel Rejection (dB) | Non-adjacent rejection (dB) |
|------------|-------------|---------------------------------|-----------------------------|
| BPSK | 1/2 | 28 | 42 |
| BPSK | 3/4 | 27 | 41 |
| QPSK | 1/2 | 25 | 39 |
| QPSK | 3/4 | 23 | 37 |
| 16QAM | 1/2 | 20 | 34 |
| 16QAM | 3/4 | 16 | 30 |
| 64QAM | 2/3 | 12 | 26 |
| 64QAM | 3/4 | 11 | 25 |

5.9 Channel Types

5.9.1 Operation of Control Channel (CCH) and Service Channel (SCH) will be deployed in Singapore, and altogether 7 channels have been defined as shown in Table 5. In an ascending order in frequency, Channel 172 and Channel 174 are assigned as the ISM-Band Public/Private Service Channel (ISM-CH1 and ISM-CH2). Channel 176 is assigned as the V2V Safety Service Channel (SSCH), while Channel 178 is assigned as the CCH. Channel 180 and Channel 182 are assigned as the Public/Private Service Channel (PP-SCH) and the Public Channel (PUB-SCH) for Road Pricing Service respectively. Lastly, Channel 184 is assigned as the Long Range Service Channel (LR-SCH).

Table 5: Channel Types

| Channel No. | Centre Frequency (MHz) | Channel Name | Channel Type |
|-------------|------------------------|--|-----------------|
| 172 | 5860 | ISM Band Public/Private Channel (ISM-SCH1) | Service Channel |
| 174 | 5870 | ISM Band Public/Private Channel (ISM-SCH2) | Service Channel |
| 176 | 5880 | V2V Safety Channel (SSCH) | Service Channel |
| 178 | 5890 | Control Channel (CCH) | Control Channel |
| 180 | 5900 | Public/Private Channel (PP-SCH) | Service Channel |
| 182 | 5910 | Public Channel (PUB-SCH) | Service Channel |
| 184 | 5920 | Long Range Channel (LR-SCH) | Service Channel |

Note: The actual carrier centre frequency for any given channel shall be maintained within the range $f_c \pm 20\text{ppm}$.

5.9.2 Both PUB-SCH and LR-SCH are public channels that only government agencies and their designated entities are allowed to install and operate DSRC devices. LR-SCH is for applications requiring a large coverage area. PUB-SCH is dedicated to Road Pricing related applications that are managed by LTA.

5.9.3 SSCH is dedicated to V2V Safety applications, whereas CCH is used for WSMP messages and management messages.

5.9.4 PP-SCH, ISM-SCH1, and ISM-SCH2 are Service Channels that can be used by both government agencies and private entities.

5.9.5 Only operation of 10 MHz channel will be allowed. Operation of 20 MHz channel by combining two

10 MHz channels will not be allowed.

5.10 Communication Services

5.10.1 CCH communications and SCH communications are delivered by the IEEE 1609 WAVE protocols, supporting various applications running on a DSRC device. CCH is a “rendezvous” channel that allows multiple-channel-capable DSRC devices to tune in at the same time to find each other. Only WSMs, WSA, and management frames are allowed on the CCH. V2V safety messages and IP packages (UDP, TCP) are not allowed on the CCH.

5.10.2 SCH is the “service delivery” channel where applications data is transferred. The data allowed on SCH is dependent on the SCH types:

- Only BSM that conveys information supporting V2V safety-related use cases are permitted on the V2V SSCH.
- All messages and application data that are not conveyed on CCH and V2V SSCH are allowed on any of the public or private channels.

5.10.3 Operation on one SCH requires one DSRC radio interface. Operation on more than one SCH is allowed, which may require additional radio interfaces to operate at the same time. For example, it requires a DSRC device to be equipped with 2 DSRC radio interfaces to operate on both PUB-SCH and SSCH at the same time.

5.10.4 A DSRC device (RSU) providing services or applications on SCH may advertise its services using WSA on CCH. An OBU may listen to CCH for WSA and switch to the advertised SCH for the interested services. It is noted that the power limit for transmitting advertising messages on CCH is tied to the power limit of each SCH. Specifically, the power limits of advertising on CCH for LR-SCH and other SCHs are 39dBm and 33dBm respectively, as illustrated in Figure 2.

5.10.5 Services may also be provided on a predefined SCH without advertising on CCH. In this case, a DSRC device may stay on the interested SCH and does not need to switch to CCH periodically.

5.11 User Priority

The IEEE 1609.4 [4] standard for multi-channel operations provides safety and non-safety applications up to eight levels of MAC sublayer priority, using User Priority (UP) and related Access Category (AC) of QoS enhanced distributed channel access (EDCA) as specified in IEEE 802.11 [1].

Annex A

DSRC Use Cases

A.1 Localisation

The Next Generation (NG) Congestion Management System may introduce service applications where one or several RSUs placed along the roadside may provide location augmentation to the OBU attached in the vehicle.

A.2 Electronic Parking Management

With the implementation of the NG Congestion Management System, the existing EPS can be upgraded together with the OBUs, leveraging the 5.9 GHz DSRC for parking payment transactions through means of both frontend and backend payment. This is also applicable to vehicle access controls for private residential premises, etc.

A.3 Traffic Signal Control Management

With placement of RSUs along the routes to the traffic junctions, traffic data may be collected from the vehicles On-Board Unit (OBU) to better manage the traffic control functions for applications such as adaptive phasing of traffic lights at the junctions. This is also applicable to vehicle priority for emergency vehicles (ambulances, fire engines, etc.) and in public transportation (e.g. buses) at the traffic junctions.

A.4 Traffic Information

These are use cases identified for disseminating traffic information, namely, in-vehicle Variable Message System (VMS), Warnings (Road Conditions, Obstruction, Road Works, Low Height Clearance, etc.), Stop Light Assistance, Curve Speed Assistance and Parking Availability to the OBU attached in the vehicle. Within the control of privacy rules, anonymous traffic data such as location and speed may be collected for traffic analysis.

A.5 Safety Applications

These are use cases of the V2V Safety Channel (SSCH) for Intersection Collision Warning Avoidance, Cooperative Vehicle System – Platooning, Cooperative Adaptive Cruise Control (CACC) and Cooperative Collision Warning. Specific services for the Autonomous Vehicle (AV), as well as for alerting vehicles of approaching emergency vehicles are also included under safety applications.

A.6 Emergency Applications

Live video obtained from DSRC devices may be sent to a control centre to provide the required information as supporting evidence.

A.7 Kiosk Related Services

Diagnostic data such as automotive repair records, firmware/software updates may be provided through a service kiosk. Drivers' daily log may be collected through a kiosk for better planning and control in fleet management. Value added services such as purchasing data (music, videos and maps), food takeaways or fuel may be provided through a service kiosk.

A.8 Other ITS Application and Services

Pedestrians and cyclists may carry DSRC devices to alert approaching vehicles to slow down and drive with caution. Notifications may be sent to vehicles registered for services such as advertisements or receiving other valued information.

Annex B

Protocol Implementation Conformance Statement (PICS)

An ITS service provider may use the PICS to indicate which features are supported by an implementation of DSRC; a consumer of DSRC devices may employ the PICS to note the features required for a particular deployment. A supplier/tester may use the PICS as a checklist against which to verify the conformance of the DSRC device by entering “Yes”, “No” or not applicable (“NA”) into the Support column of the PICS.

Notes: Entries in the Item column may be hierarchical. Thus, an entry of the form M<a>. indicates the item is part of the group identified by the item M<a> where all members of the group are subject to the conditions of applicability of M<a> [i.e., features lower in the numbering hierarchy (M<a>.) are only applicable if the next higher level feature (M <a>) is identified in the Conformance column as being present].

Parentheses in the Value column indicate the user should enter information as specified in the accompanying footnote.

An entry of the form <predicate>:<S> in the Status column indicates that the status <S> applies if the item identified by <predicate> is identified in the Support column as being present.

Each item referenced in a predicate, or a preliminary question for grouped conditional items, is indicated by an asterisk in the Item column.

Valid status values in the Status column are M, O, O<n>, and C<n>.

- A status of M indicates a mandatory feature.
- A status of O indicates an optional feature.
- A status of O<n> indicates a mutual condition such that the feature is optional, but that support of at least one of the items that have status O<n> is mandatory.
- A status of C<n> indicates a mutual condition such that support of only one of the items that have status C<n> is mandatory.

Table B.1: PICS of an Implementation of IEEE 802.11 [1]

| Item | Feature | References | Status | Support Yes/No/NA |
|---|---|---|--------------------|----------------------|
| Mandatory Configuration (CF) for Implementation Under Test (IUT) | | | | |
| *CF1 | Access point (AP) | § 4.3 and B.4.3 [1] | O1 | |
| *CF2 | Independent station (neither an AP nor a mesh station) | | O1 | |
| *CF2.1 | Operation in an infrastructure Basic Service Set (BSS) | | CF2:M | |
| *CF2.3 | Independent station operating outside the context of a BSS (dot11OCBAActivated is true) | § 10.20 and B.4.3 [1] | CF17:M | |
| *CF6 | Orthogonal frequency division multiplexing (OFDM) PHY | § 5.4, § 5.5, § 5.6, § 5.7, § 5.8 and § 5.9 of IMDA TS DSRC. Refer to Note | M | |
| *CF17 | 5.9 GHz OFDM PHY | | § 18 and B.4.3 [1] | M |
| <p>Note: DSRC devices shall be classified for operation in this frequency band by their max output power and EIRP limit as listed in Table 1 of IMDA TS DSRC, and comply with the spectrum mask requirement for their class listed in Table 2 and defined in § 5.6.1 of IMDA TS DSRC.</p> | | | | |

Table B.1: PICS of an Implementation of IEEE 802.11 [1] Cont'd

| Item | Feature | References | Status | Support Yes/No/NA |
|---------------|---|--|--|--|
| XX<n> | MAC protocol | B.4.4 [1] | IUT shall comply with these items identified as "M" in the Status column of B.4.4 [1]. | |
| OF1. | OFDM PHY Specific Service Parameters | § 18 and B.4.8 [1] | IUT shall comply with these items identified as "M" in the Status column of B.4.8 [1] | |
| OF2. | OFDM PLCP Sublayer | § 18 and B.4.8 [1] | IUT shall comply with these items identified as "M" in the Status column of B.4.8 [1] | |
| OF3.2.8 | 5.9 GHz band | § 5.4 and Figure 2 of IMDA TS DSRC | IUT shall comply with this item as CF17 is identified as "M" in this PICS, according to IMDA's regulation. | |
| OF3.3.16 | 5.9 GHz band (10 MHz channel spacing) | § 5.6 and Table 2 of IMDA TS DSRC | IUT shall comply with this item according to IMDA's regulation. | |
| OF3.4 | Number of operating channels | § 5.9 and Table 5 of IMDA TS DSRC | IUT shall comply with these two items according to IMDA's regulation. | |
| OF3.5 | Operating channel frequencies | | | |
| OF3.6 | Transmit in band and out of band spurious emission | § 5.6.2 of IMDA TS DSRC | IUT shall comply with this item according to IMDA's regulation. | |
| *OF4.1.4 | Power Level (5.855–5.925 GHz), Class A | § 5.5 and Table 1 of IMDA TS DSRC | At minimum, IUT shall be classified to transmit at a power level not exceeding Class A, or may be classified to transmit at a power level not exceeding Class B, Class C or Class D, according to IMDA's regulation. | Please indicate IUT's operating Class. |
| *OF4.1.5 | Power Level (5.855–5.925 GHz), Class B | | | |
| *OF4.1.6 | Power Level (5.855–5.925 GHz), Class C | | | |
| *OF4.1.7 | Power Level (5.855–5.925 GHz), Class D | | | |
| OF4.2 | Spectrum mask | § 5.6 and Table 2 of IMDA TS DSRC Figure 18-14 [1] | IUT shall comply with these three items according to IMDA's regulation. | |
| OF4.3 | Spurious | § 5.6.2 of IMDA TS DSRC | | |
| OF4.4 | Centre frequency tolerance | § 5.9.1 of IMDA TS DSRC | | |
| OF5.1 | Receiver minimum input level sensitivity | § 5.7 and Table 3 of IMDA TS DSRC | IUT shall comply with this item according to IMDA's regulation. | |
| OF5.2 & OF5.3 | Receiver adjacent and non-adjacent channel rejection | § 5.8 and Table 4 of IMDA TS DSRC § 18.3.10.3 and § 18.3.10.4 [1] | IUT shall comply with these two items according to IMDA's regulation. | |
| QD8 | Default EDCA parameters for communications outside context of BBS | B.4.15 [1] | IUT shall comply with this item as items CF2.3 and CF17 are identified as "M" in this PICS. | |

Table B.2: PICS of an Implementation of IEEE 1609.4 [4]

| Item | Feature | Value | IEEE 1609.4 [4] | Status | Support Yes/No/NA |
|-----------|---|------------------|-----------------|---------|----------------------|
| M1. | OCBActivated communication | () ^a | 5.1 | M | |
| M2. | Operation on CCH ^{Note 1} | () ^b | 5.2 | O4 | |
| M2.1. | Continuous CCH access | | 6.3.1 | O | |
| M3. | Operation on SCH ^{Note 1} | () ^c | 5.2 | O4 | |
| M3.1. | Continuous SCH access | | 6.3.1 | O | |
| M4. | Mixed operation | | 5.2 | O | |
| M4.1. | Immediate access | | 6.3.3 | O | |
| M4.2. | Alternating access | | 6.3.2 | O | |
| M4.2.1. | Use common time reference | | 5.2.2, 6.2.1 | M | |
| M4.2.1.1. | Derive timing from GPS | | 6.2.3 | O5 | |
| M4.2.1.2. | Derive timing from Timing Advertisement frame | | 6.2.3 | O5 | |
| M4.2.1.3. | Derive timing from other timing source | () ^d | 6.2.3 | O5 | |
| M4.2.2. | Guard interval on transmit | | 6.2.5 | M | |
| M4.2.3. | Medium busy at end of guard interval | | 6.2.5 | M | |
| M5. | Transmit | | 5.3.2 | O2 | |
| M5.1. | EDCA and user priority | | 5.4 | M | |
| M5.2. | Cancel transmissions | | 5.3.2 | O | |
| M5.3. | Send TA | | 6.2.6 | O | |
| M5.4. | Send other IEEE 802.11 frames | () ^e | 6.4 | O | |
| M5.5. | Send WSM ^{Note 2} | | 5.3.3 | O3 | |
| M5.5.1. | Expiry time | | 5.3.3 | O | |
| M5.6. | Send IPv6 ^{Note 2} | | 5.3.4 | O3 | |
| M6. | Receive | | 5.3.5 | O2 | |
| M6.1. | Receive TA | | 6.2.7 | O | |
| M6.2. | Receive WSM ^{Note 2} | | 5.3.3 | O3 | |
| M6.3. | Receive IPv6 ^{Note 2} | | 5.3.4 | O3 | |
| M7. | Device readdressing | | 6.6 | O | |
| M8. | MIB maintenance | | 6.5 | — | |
| M8.1. | Managed WAVE device | | 3.1, 6.5 | O | |
| M8.2. | IEEE 1609.4 MIB per Annex E | | 6.5 | M8.1: M | |
| M8.3. | Other MIB | () ^f | 6.5 | O | |

- ^a Enter number of simultaneous channels supported.
- ^b List supported control channel(s), and operating class ^{Note 1}.
- ^c List supported service channel(s), and operating class ^{Note 1}.
- ^d Indicate device's timing source(s).
- ^e Enter IEEE 802.11 management frames/service request primitives supported.
- ^f Enter references to other management information bases supported.

Note 1: Use of Control Channels (CCH) and Service Channels (SCH) shall be as defined in § 5.9 and Table 5 of IMDA TS DSRC, and operating class shall be according to Table 1 of IMDA TS DSRC.

Note 2: DSRC devices (RSU/OBU) shall be able to send or receive over one of these protocols; or both.

Table B.3: PICS of an Implementation of IEEE 1609.3 [3]

| Item | Feature | Value | IEEE 1609.3 [3] | Status | Support Yes/No/NA |
|-----------|--|------------------|-----------------|--------|----------------------|
| N1. | DATA PLANE | | — | — | |
| N1.1. | LLC | | 5.2 | M | |
| N1.1.1. | LLC extensions for WSMP | | 7.5 | N1.3:M | |
| N1.2. | IPv6 | | 5.3, 6.4 | O1 | |
| N1.2.1. | Use stateless configuration | | 6.4 | O | |
| N1.2.2. | IP readdressing | | 6.4.2 | M | |
| N1.2.3. | Send IP datagrams | | 5.3 | O2 | |
| N1.2.4. | Receive IP datagrams | | 5.3 | O2 | |
| N1.2.4.1. | Receive by link-local address | | 6.4 | M | |
| N1.2.4.2. | Receive by global address | | 6.4 | M | |
| N1.2.4.3. | Receive by host multicast addresses | | 6.4 | O3 | |
| N1.2.4.4. | Receive by router multicast addresses | | 6.4 | O3 | |
| N1.2.5. | UDP | | 5.4 | O | |
| N1.2.6. | TCP | | 5.4 | O | |
| N1.2.7. | Other IETF protocols | () ^a | 5.4 | O | |
| N1.3. | WSMP | | 5.5 | O1 | |
| N1.3.1. | WSM reception | | 5.5.3 | O4 | |
| N1.3.1.1. | Check WSMP Version number | () ^b | 5.5.3, 8.3.2 | M | |
| N1.3.1.2. | Check Subtype field | () ^r | 5.5.3, 8.3.2 | M | |
| N1.3.1.3. | Check TPID field | () ^s | 5.5.3, 8.3.2 | M | |
| N1.3.1.4. | WAVE Info Elem Extension field | | 8.1.1 | M | |
| N1.3.1.5. | Deliver message based on Address Info (PSID) | | 5.5.3 | M | |
| N1.3.2. | WSM transmission | | 5.5.2 | O4 | |
| N1.3.2.1. | Insert WSMP Version number | | 8.3.2 | M | |
| N1.3.2.2. | Insert Address Info (PSID) | | 8.3.3 | M | |
| N1.3.2.3. | Outbound message size | () ^c | 5.5.2 | M | |
| N1.3.2.4. | Transmit channel number | | 8.3.4.2 | O | |
| N1.3.2.5. | Transmit data rate | | 8.3.4.3 | O | |
| N1.3.2.6. | Transmit Power Used | | 8.3.4.4 | O | |
| N1.3.2.7. | Channel Load | | 8.3.4.5 | O | |
| N1.3.2.8. | Insert Subtype features | () ^r | 8.3.2 | M | |
| N1.3.2.9. | Insert TPID features | () ^s | 8.3.2 | M | |

Table B.3: PICS of an Implementation of IEEE 1609.3 [3] Cont'd

| Item | Feature | Value | IEEE 1609.3 [3] | Status | Support Yes/No/NA |
|---------------|--------------------------------------|------------------|-----------------|--------|----------------------|
| N2. | MANAGEMENT PLANE | | — | — | |
| N2.1. | User role | | 6.2.1 | O | |
| N2.1.1. | Receive WSAs over WSMP | | 6.3.2 | O5 | |
| N2.1.2. | Verify and accept Secured WSA | | 6.3.3, 8.2.1 | O5 | |
| N2.1.3. | Accept Unsecured WSA | | 6.3.3, 8.2.1 | O5 | |
| N2.1.4. | WAVE Info Elem Extension fields | | 8.1.1 | M | |
| N2.1.5. | Calculate avail service link quality | | 6.3.4 | O | |
| N2.1.6. | WSA header | | 8.2.2 | M | |
| N2.1.6.1. | Check WSA Version number | () ^d | 8.2.2.2 | M | |
| N2.1.6.2. | Check WSA Identifier | | 8.2.2.4 | O | |
| N2.1.6.3. | Check Content Count | | 8.2.2.5 | O | |
| N2.1.6.4. | WSA header Info Element Ext field | | 8.2.2.6 | M | |
| N2.1.6.4.1. | Repeat Rate | | 8.2.2.6.1 | O | |
| N2.1.6.4.2. | 2DLocation | | 8.2.2.6.2 | O | |
| N2.1.6.4.3. | 3DLocation | | 8.2.2.6.3 | O | |
| N2.1.6.4.4. | Advertiser Identifier | | 8.2.2.6.4 | O | |
| N2.1.6.4.5. | Other info elements | () ^e | 8.2.2.6 | O | |
| N2.1.7. | Service Info Segment | | 8.2.3 | M | |
| N2.1.7.1. | Number of Service Info Instances | () ^f | 8.2.3 | M | |
| N2.1.7.2. | WAVE Information Element Extension | | 8.2.3.5 | M | |
| N2.1.7.2.1. | PSC | | 8.2.3.5.1 | O | |
| N2.1.7.2.2. | IPv6 Address | | 8.2.3.5.2 | O | |
| N2.1.7.2.3. | Service Port | | 8.2.3.5.3 | O | |
| N2.1.7.2.4. | Provider MAC Address | | 8.2.3.5.4 | O | |
| N2.1.7.2.5. | RCPI Threshold | | 8.2.3.5.5 | O | |
| N2.1.7.2.6. | WSA Count Threshold | | 8.2.3.5.6 | O | |
| N2.1.7.2.6.1. | WSA Count Threshold Interval | | 8.2.3.5.7 | O | |
| N2.1.7.2.7. | Other info elements | () ^g | 8.2.3.5 | O | |
| N2.1.8. | Channel Info Segment | | 8.2.4 | M | |
| N2.1.8.1. | Number of Channel Info Instances | () ^h | 8.2.4 | M | |
| N2.1.8.2. | WAVE Info Elem Extension field | | 8.2.4.8 | M | |
| N2.1.8.2.1. | EDCA Parameter Set | | 8.2.4.8.1 | O | |
| N2.1.8.2.2. | Channel Access | | 8.2.4.8.2 | O | |
| N2.1.8.2.3. | Other info elements | () ⁱ | 8.2.4.8 | O | |

Table B.3: PICS of an Implementation of IEEE 1609.3 [3] Cont'd

| Item | Feature | Value | IEEE 1609.3 [3] | Status | Support Yes/No/NA |
|-------------|---------------------------------------|------------------|--------------------|--------|----------------------|
| N2.1.9. | WAVE Router Advertisement | | 8.2.5.1 | O | |
| N2.1.9.1. | WAVE Info Elem Extension field | | 8.2.5.7 | M | |
| N2.1.9.1.1. | Secondary DNS | | 8.2.5.7.1 | O | |
| N2.1.9.1.2. | Gateway MAC Address | | 8.2.5.7.2 | O | |
| N2.1.9.1.3. | Other info elements | () ^j | 8.2.5.7 | O | |
| N2.2. | Provider role | | 6.2.1 | O | |
| N2.2.1. | Send Service Advertisements over WSMP | | 6.2.3.3 | M | |
| N2.2.1.1. | Send Secured WSA | | 6.2.4.2.1, 8.2.1 | O6 | |
| N2.2.1.2. | Send Unsecured WSA | | 6.2.4.2.1, 8.2.1 | O6 | |
| N2.2.2. | Send repeated advertisements | | 6.2.4.2.1 | O | |
| N2.2.3. | Change ongoing advertisements | | 6.2.2.2, 6.2.4.2.2 | O | |
| N2.2.4. | Delete application-service | | 6.2.3.6 | O | |
| N2.2.5. | WSA header | | 8.2.2 | M | |
| N2.2.5.1. | Set WSA Version | | 8.2.2.2 | M | |
| N2.2.5.2. | Set WSA Identifier | | 8.2.2.4 | M | |
| N2.2.5.3. | Set Content Count | | 8.2.2.5 | M | |
| N2.2.6. | WSA header Info Element Ext field | | 8.2.2.6 | M | |
| N2.2.6.1. | Repeat Rate | | 8.2.2.6.1 | O | |
| N2.2.6.2. | 2DLocation | | 8.2.2.6.2 | O | |
| N2.2.6.3. | 3DLocation | | 8.2.2.6.3 | O | |
| N2.2.6.4. | Advertiser Identifier | | 8.2.2.6.4 | O | |
| N2.2.6.5. | Other info elements | () ^k | 8.2.2.6 | O | |
| N2.2.7. | Service Info Segment | | 8.2.3 | M | |
| N2.2.8. | Number of Service Info Instances | () ^l | 8.2.3 | M | |
| N2.2.9. | WAVE Info Elem Extension field | | 8.2.3.5 | O | |
| N2.2.9.1. | PSC | | 8.2.3.5.1 | O | |
| N2.2.9.2. | IPv6 Address | | 8.2.3.5.2 | O | |
| N2.2.9.3. | Service Port | | 8.2.3.5.3 | O | |
| N2.2.9.4. | Provider MAC Address | | 8.2.3.5.4 | O | |
| N2.2.9.5. | RCPI Threshold | | 8.2.3.5.5 | O | |
| N2.2.9.6. | WSA Count Threshold | | 8.2.3.5.6 | O | |
| N2.2.9.6.1. | WSA Count Threshold Interval | | 8.2.3.5.7 | O | |
| N2.2.9.7. | Other info elements | () ^m | 8.2.3.5 | O | |

Table B.3: PICS of an Implementation of IEEE 1609.3 [3] Cont'd

| Item | Feature | Value | IEEE 1609.3 [3] | Status | Support Yes/No/NA |
|--------------|----------------------------------|------------------|-----------------|----------|----------------------|
| N2.2.10. | Channel Info Segment | | 8.2.4 | M | |
| N2.2.11. | Number of Channel Info Instances | () ⁿ | 8.2.4 | M | |
| N2.2.12. | WAVE Info Elem Extension field | | 8.2.4.8 | O | |
| N2.2.12.1. | EDCA Parameter Set | | 8.2.4.8.1 | O | |
| N2.2.12.2. | Channel Access | | 8.2.4.8.2 | O | |
| N2.2.12.3. | Other info elements | () ^o | 8.2.4.8 | O | |
| N2.2.13. | Send WRA | | 8.2.5 | O | |
| N2.2.13.1. | WAVE Info Elem Extension field | | 8.2.5.7 | O | |
| N2.2.13.1.1. | Secondary DNS | | 8.2.5.7.1 | O | |
| N2.2.13.1.2. | Gateway MAC address | | 8.2.5.7.2 | O | |
| N2.2.13.1.3. | Other info elements | () ^p | 8.2.5.7 | O | |
| N2.3. | Timing advertisement | | — | | |
| N2.3.1. | Timing Advertisement generation | | 6.2.4.3 | O | |
| N2.4. | MIB maintenance | | 6.5 | — | |
| N2.4.1. | Managed WAVE device | | 6.5 | O | |
| N2.4.2. | MIB per standard | | 6.5 | N2.4.1:M | |
| N2.4.3. | Other MIB | () ^q | 6.5 | O | |

- a List protocols supported.
- b List version numbers supported.
- c Enter maximum WAVE Short Message length.
- d List version numbers supported.
- e List any other WSA header WAVE Information Elements processed on reception.
- f Enter maximum number of Service Info Instances processed on reception.
- g List any other Service Info Segment WAVE Information Elements processed on reception.
- h Enter maximum number of Channel Info Instances processed on reception.
- i List any other Channel Info Segment WAVE Information Elements processed on reception.
- j List any other WAVE routing advertisement WAVE Information Elements processed on reception.
- k List any other WSA header WAVE Information Elements supported on transmission.
- l Enter maximum number of Service Info Instances supported on transmission.
- m List any other Service Info Segment WAVE Information Elements supported on transmission.
- n Enter maximum number of Channel Info Instances supported on transmission.
- o List any other Channel Info Segment WAVE Information Elements supported on transmission.
- p List any other WAVE routing advertisement WAVE Information Elements supported on transmission.
- q List any other MIBs supported.
- r List Subtype values supported.
- s List TPID values supported.

Annex C**Corrigendum / Addendum**

| Revised TS | | Items Changed | Effective Date |
|--|----------------------|---|----------------|
| Page | Reference | | |
| Changes to IMDA TS DSRC Issue 1, Oct 16 | | | |
| 13 | Annex B Table B.1 | The IMDA TS DSRC Issue 1 has been replaced by the IMDA TS DSRC Issue 1 Rev 1. Changes are mainly to provide clarity in requirements for implementation of the IEEE 802.11 WLAN MAC and PHY layer specifications, operating Outside the Context of a Basic service set (OCB). | 5 Oct 17 |